



## 4K Executive Series HDMI Cable

Product Number: 880610/880611

## Product Overview


Introducing Beetek Executive HDMI cable, expertly-crafted for the refined demands of Meeting Rooms and Board Rooms. Equipped with gold-plated and 'Plug-Sure' connectors, it ensures a secure and steadfast connection with laptops, while delivering flawless performance. The ultra-premium flow silicone outer jacket is engineered to endure repeated flexing without compromising durability, offering a tangle-free and dust-resistant solution. The sleek design not only ensures superior connectivity but also enhances the professional aesthetic of any space. Elevate your boardroom experience with unmatched reliability and elegance.



## Product Features

- ✦ An elegant HDMI cable designed exclusively for the boardroom.
- ✦ Available in two colorways, to match boardroom theme.
- ✦ Ergonomic connector head for easy plugging and unplugging.
- ✦ The "plug-sure" type HDMI connectors provide reliable connections.
- ✦ Flexible silicone outer jacket and strain relief (SR) allow the cable to endure repetitive bending without compromising its integrity.
- ✦ A slender form factor facilitates seamless installation even in the most confined spaces.
- ✦ 15µm gold-plated pins built to withstand more than 1,000 plug cycles.
- ✦ Available in 2m, 3m, and 5m lengths.

## Product Detail Drawing

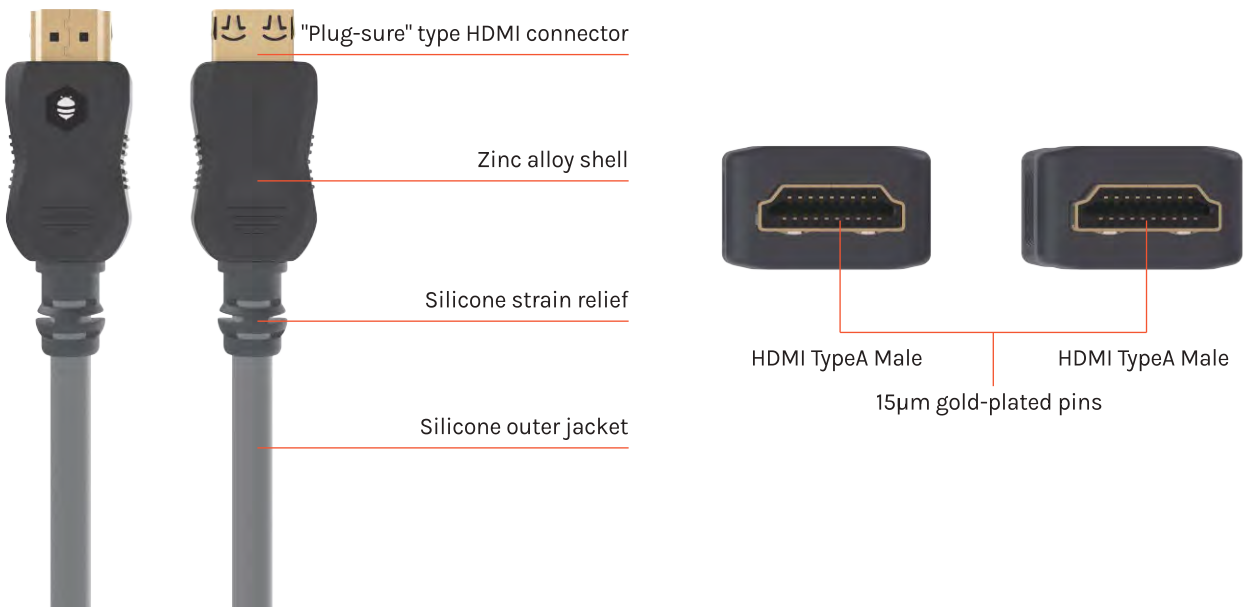


## Product Parameter

Name	Specifications
Product Name	HDMI Male-HDMI Male Cable(for meeting)
Model	H20-FLEX-EXEC-xxMG/MB
Brand	beetek
Signal Type	HDMI 2.0
Connector Type	HDMI TypeA Male - HDMI TypeA Male
Environmental Info	RoHS 2.0 Compliant
Connector Gold Plating	15μm
Connector Size	42*22*12mm
Connector Structure	Plug plate + Inner mold + Copper foil + Shell
Connector Fastening Type	"Plug-sure" type HDMI connector
Shell	Zinc alloy
Components	Conductor + Drain(Copper)+ PTFE tape + Aluminum foil + Mylar + Braid + Silicone jacket
Conductor Material	Tinned copper stranded
Conductor Gauge	28AWG
Braid Material	Braided copper wire
Shield Coverage	70%
Jacket Material	Silicone
Cable Diameter	6.5±0.2mm
Cable Color	Medium Gray and Dark Gray
Strain Relief(SR)	Silicone
EDID	Yes
DDC	Yes
HDMI Audio	Yes
3D	Yes
CEC	Yes
ARC	Yes
HDCP	Yes
HDR	Yes
XvYCC Color Space	Yes
Compatibility	Backward compatible with HDMI and DVI-SL
Supported Resolutions	3840*2160@60Hz
Clock Bandwidth	600MHz*3
Transmission Rate	18Gbps
Plug and Play	Yes
Delay	Zero
Deep Color	Yes
Sampling Rate	RGB 4:4:4, YUV 4:4:4, YUV 4:2:2, YUV 4:2:0
Compression	None
Electrical Test (Voltage)	Voltage: DC 300V
Impedance Test (Insulation)	Insulation resistance: ≥ 10MΩ
Impedance Test (Continuity)	On-resistance: ≤ 2Ω
Tensile Strength	≤400N

Name	Specifications
Bending Angle	90°
Operating Temperature	-20 C ~80 C
Optional Length	0.5, 1, 2, 3, 5 meters
Bag Size	37*29cm
Carton Size	46*33*26cm
Weight (per bag)	0.5m/71g, 1m/104g, 2m/175g, 3m/246g, 5m/388g
Applications	Rental and Staging, Fixed installation and IT peripherals
Uninterrupted duration	7 * 24 * 365

### Dimensional Drawing

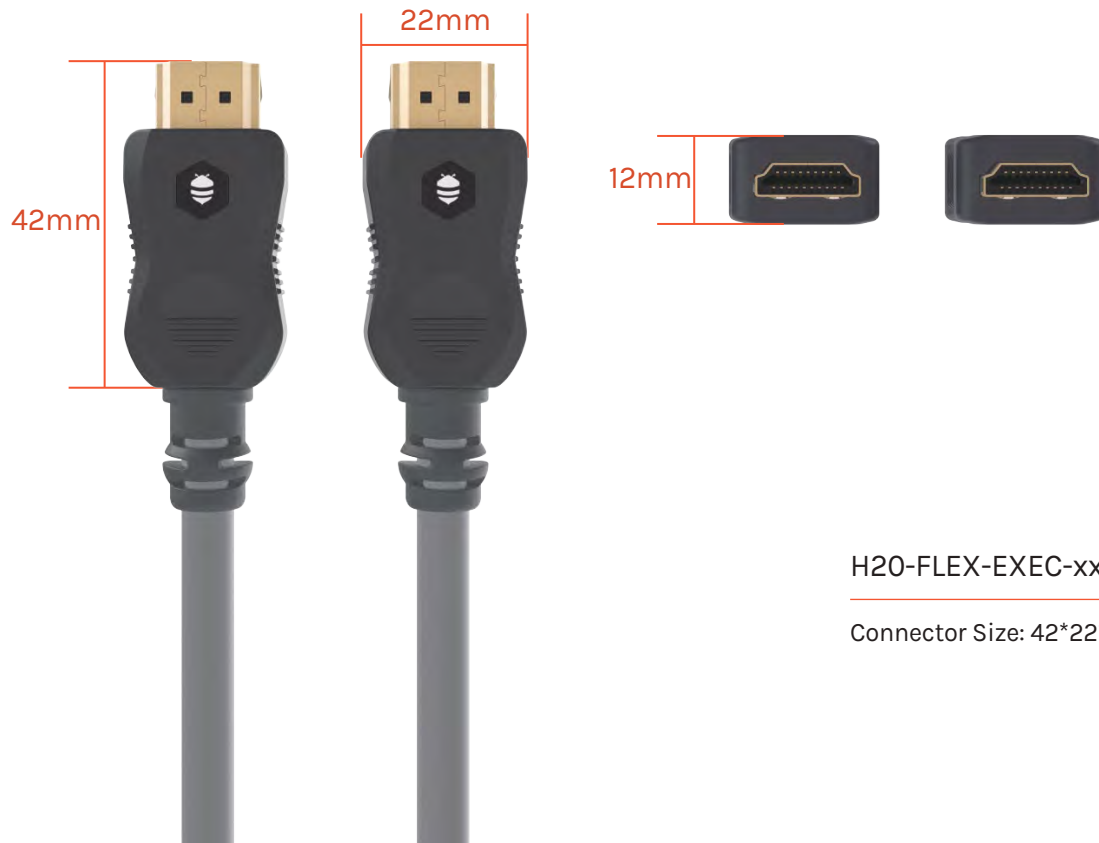

H20-FLEX-EXEC-xxMG/MB

Connector Size: 42\*22\*12mm



Full catalog



WhatsApp



Instagram



Facebook