



TPU Multi-mode OM3 Armored Fiber Cable, 8-core

Product Number: 990203

Product Overview

The G202-xxU-8LC is a eight-core multi-mode finished fiber cable, which is mainly used with audio and video optical fiber extenders. This eight-core multi-mode 50/125 OM3 fiber with LC-type connectors can transmit up to 300 meters while maintaining a 10Gbps bandwidth. Different from generic fiber cables, Beetek designed their fiber using tough and wear-resistant TPU sheathing, and the inside uses stainless steel armored tube, Kevlar and a metal braided structure. This structure ensures the cable has strong tensile and compressive strength. At the end points, the product is also equipped with integrated LC connectors, which are not easily broken like their generic counterparts. Plus, the cable comes with a captive dust cap and Beetek's patented aluminum connector protector as standard to ensure repeated use in harsh environments.




*Fiber length, core quantity and connector types can all be customized.



Product Features

- Adopts high-quality YOFC multi-mode OM3 fiber core.
- The transmission rate is 10Gbps up to 300 meters.
- The pliable yet rugged TPU outer sheath and built-in armored piping structure make the cable both durable and flexible at the same time.
- The interior uses DuPont Kevlar and metal woven reinforcement structure.
- LC connectors are integrated into the cable for strong and reliable connections.
- Maintains the characteristics of anti-freezing, wear resistance, tensile resistance and pressure resistance. Built to last in all conditions.
- Comes with captive LC dust caps and Beetek's patented connector protector.
- Comes standard with Velcro straps for easy storage and deployment.
- Optional DF and PCD Series cable reels are available for superior cable management.

Product Detail Drawing

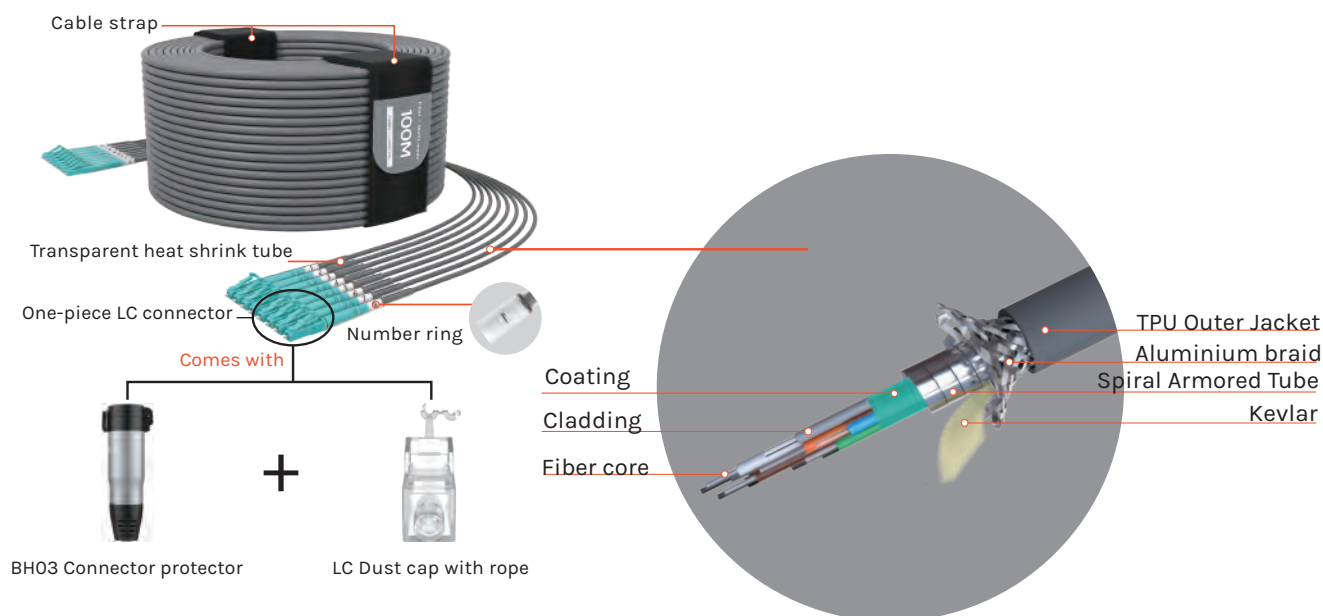

Product Specifications

Name	Specifications
Product Type	G202-xxU-8LC
Connector Type	LC
Connector Color	Light blue
Fiber Type	Multi-mode OM3-300(50/125μm)
Fiber Wavelength	850nm ~1300nm
Fiber Core Brand	YOFC
Number of cores	8
Branch Length	1 meter
Reinforcement Structure	Dupont Kevlar with metal weave
Structural Layers	Fiber core + Cladding + Coating + Spiral-armored tube + Kevlar + Aluminium braid + TPU outer jacket
Jacket Outer Diameter	5.0mm±0.1mm
Jacket Material	Matt Frosted TPU
Jacket Color	Matte Gray
Spiral Tube Diameter	2.8mm±0.1mm
Spiral Tube Material	SUS 201
Spiral Tube Color	Silver

Name	Specifications
Core Cladding Diamete	0.6mm±0.05mm*8
Core Cladding Material	PVC
Core Cladding Color	Blue, orange, green, brown, gray, white, black, yellow
Core Diameter	50.0μm±2.5μm
Cladding Diameter	124.8μm±1.0μm
Cladding out of roundness	≤1.0%
Core/cladding Concentricity Error	≤1.5μm
Coating Diameter	245±7μm
Coating layer out of roundness	≤6.0%
Cladding/coating Concentricity Error	≤12.0μm
Full Bandwidth	850nm≥1500MHz·km, 1300nm≥500MHz·km
Effective Bandwidth	850nm≥2000MHz·km, 1300nm≥500MHz·km
Attenuation Coefficient	850nm≤3.5dB/km, 1300nm≤1.5dB/km
Tensile (LC connector)	Long-term 50N, short-term 60N
Tensile (optical cable)	Long-term 400N, short-term 800N
Compressive Strength	Long-term 2000N/10cm, short-term 3000N/10cm
Linear Rolling	3000N/10cm armor layer deformation < 0.3mm, additional attenuation < 0.2dB
Minimum Bending Radius	Dynamic > 10D, Static > 20D (*D is the outer diameter of the cable)
Transmission Rate	10Gbps within 300 meters
Operating Temperature	-20°C~70°C
Available Lengths	50M, 100M, 150M, 200M, 300M
Included Accessories	Connector protector BH03*2, Dust cap LCF01*16

Product Size



Connector Type : LC

Connector Size : 4.52mm*4.52mm*21.5mm

Fiber Core Brand : YOFC

Branch Length : 1M



Full catalog



WhatsApp



Instagram



Facebook